



Wireless Structural Health Monitoring



Small Sensors, Big Difference

Protecting Infrastructure with 21st Century Technology



**Resensys SenSpot™ sensors monitor 10,000-foot Robert
Norris Bridge, Virginia**



Resensys Wireless SenSpot™

Wireless SenSpot™ sensors offer a breakthrough technology for real-time and long-term structural health monitoring.

Sample applications of SenSpot™ sensors :

- **Bridge piers and abutments:** monitoring tilt, horizontal displacement, settling, deflection, instability of foundation
- **Structural elements:** monitoring strain (stress) in girders, beams, truss members, detecting overstrain, fatigue
- **Bearings and expansion joints:** monitoring bearing tilt, movement of joints, temperature response, detecting bearing malfunction
- **Bridge load rating:** fast, easy, reliable load carrying capacity calculation assisted by strain response of bridge elements
- **Other structures:** airframes, pipelines, tunnels, towers, buildings, cranes, etc.

Total wireless solutions for remote Structural Health Monitoring

SenSpot™ Features

- **Maintenance free, low-power:** minimum battery life of 10 years
- **Wireless communication:** IEEE 802.15.4, 2.4GHz
- **Small size and lightweight:** 2in x 2in x 1in, 5oz (50mm x 50mm x 25mm, 142 gr).
- **Easy mounting:** quick installation, self-adhesive or flange mount
- **Wide working temperature:** -40 to +150°F (-40 to +65°C)
- **Long communication range:** 0.62mi (1.0Km) free space
- **Fully weather proof:** Ingress Protection of IP65

Types of SenSpot™ Sensors

- **Strain (stress),** resolution: 1 μ Strain
- **Vibration (acceleration),** resolution: 1mg
- **Tilt & inclination,** resolution: 0.5 arc seconds (0.00016 degree)
- **Humidity,** resolution: 1% RH
- **Displacement,** resolution: 4mil (0.1mm)
- **Temperature ,** resolution: 0.5 °C

Certification: MIL-STD-461F



RESENSYS PRODUCTS

- ❑ SenSpot™: attached to structure (as many as needed, typically 10-200 per structure)
- ❑ SeniMax™: collects SenSpot data on site of SenSpot™ and sends to remote server (one per structure)
- ❑ SenScope™: software package that analyzes data & generates alerts




Displacement SenSpot™ (monitoring expansion, crack progression)



Tilt SenSpot™ (monitoring pier movements, foundation settling, bearing movement)



Strain SenSpot™ (monitoring stress/strain on members)

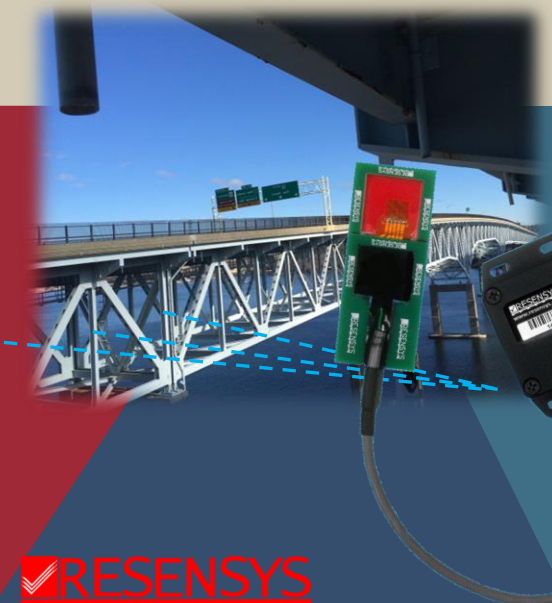

Resensys Remote Monitoring System

- **SenSpot™ sensors:** attached to the structure, any number, any combination
- **SeniMax™:** collects data from on-site SenSpot™ sensors and sends it to a remote server (one unit can cover up to 250 SenSpot™).
- **Repeater:** extends the range of SenSpot™ sensors when needed (in very large structures).
- **SenScope™:** software for sophisticated data analysis, visualization.





SeniMax™
Remote Transmission Gateway



Cloud /
Server Storage
Internet



SenScope™

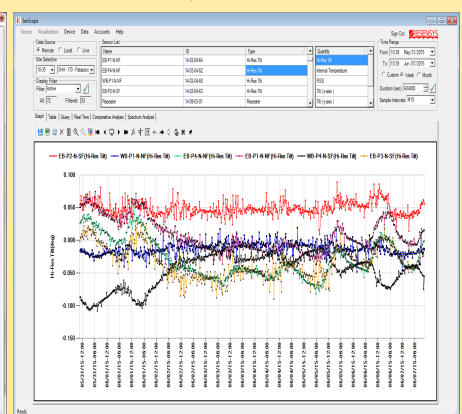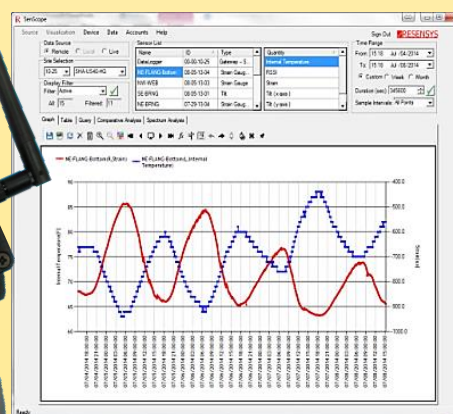

Resensys SeniMax™ Gateway

SeniMax™ receives data from SenSpot™ sensors and transmits data to a cloud based database system.

SeniMax™ is a high performance wireless data collector and remote communication gateway designed for years of uninterrupted and reliable monitoring.

SeniMax™ uses Resensys's proprietary breakthrough energy efficient communication and scheduling technology. As a result, even when it is disconnected from solar cells, it still has a full month of energy reserve for reliable operation.

SeniMax™ Features

Energy self sufficient: solar powered

Wireless protocols:

IEEE 802.15.4

Cellular: HSPA (3G), EV-DO, GPRS

IEEE 802.11 / Wireless LAN

IEEE 802.3 / Ethernet

Small size: small, easy to install

Weatherproof: IP66 protection

Coverage: up to 250 SenSpot™ sensors

Lightweight: 1.5Kg (3.0 lb)



SeniMax™ Dimensions:
150mm x 20mm x 100mm
(6in x 8in x 4in)



Resensys Satellite SeniMax™ Gateway

Satellite SeniMax offers connectivity in areas with no cellular or cable coverage.






Resensys SenScope™ Software

SenScope™ is a software package for real-time monitoring and structural diagnosis. SenScope™ is capable of converting large volumes of data into specific structural diagnostics information. The information generated by SenScope™ facilitates decision-making and accelerates the course of action for maintenance/repair.

SenScope™ features

- Communication with Resensys SenSpot™ and SeniMax™
- Real-time data visualization and management
- Automated structural diagnostics, alert generation & management
- Alert generation with customizable alert levels
- Archiving of historical data of the structure
- Capability of adding user notes per SenSpot™ sensor
- Capability of providing e-mail or text message alerts
- Report automation

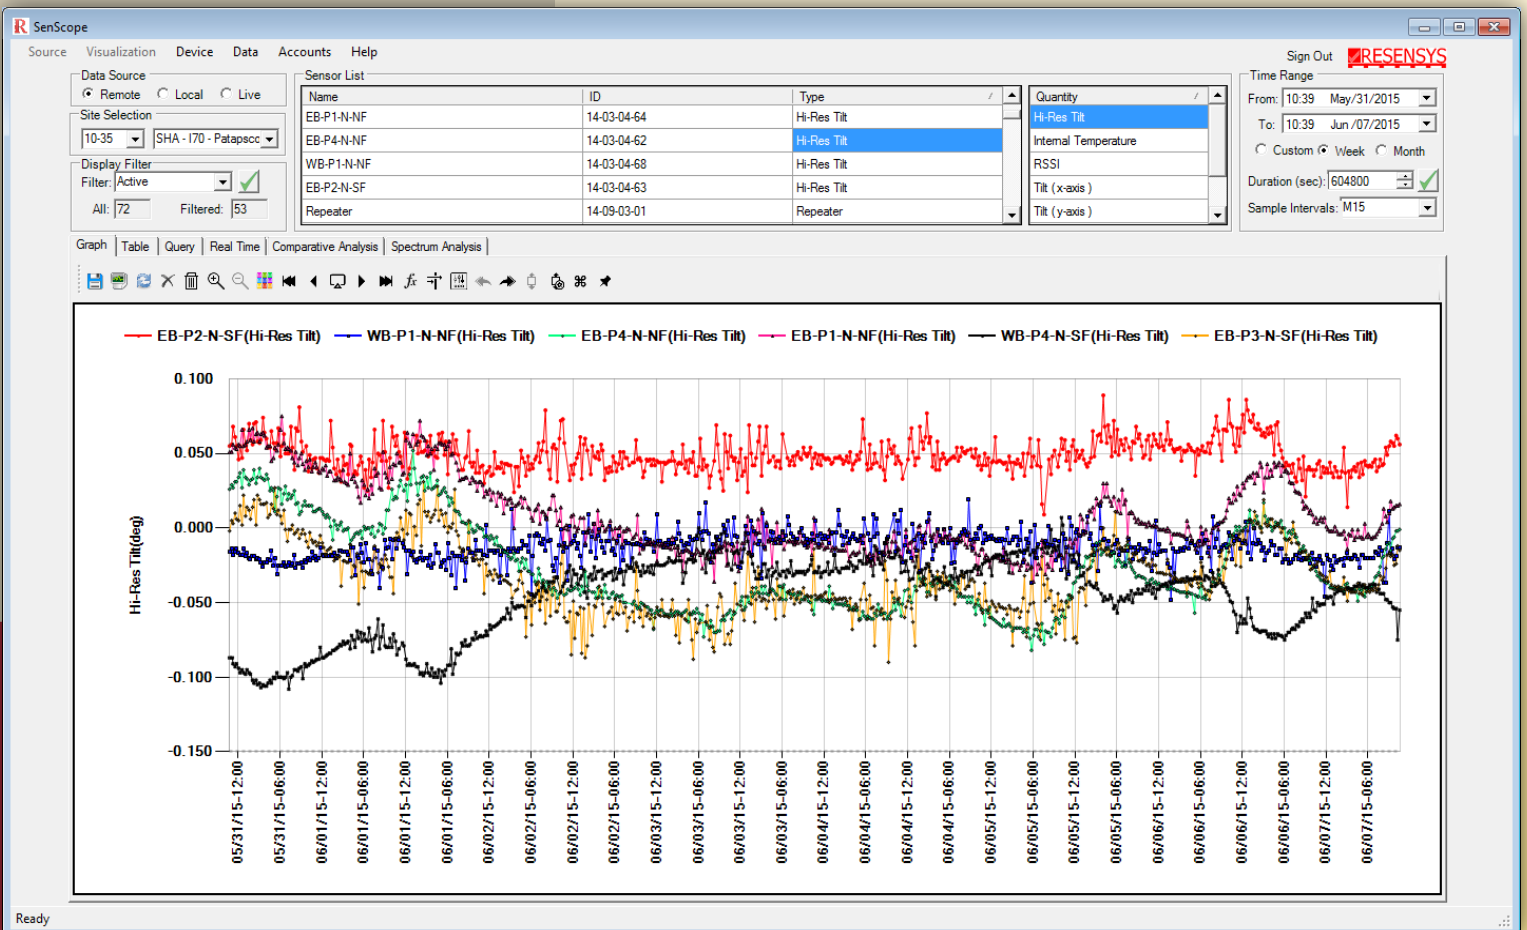
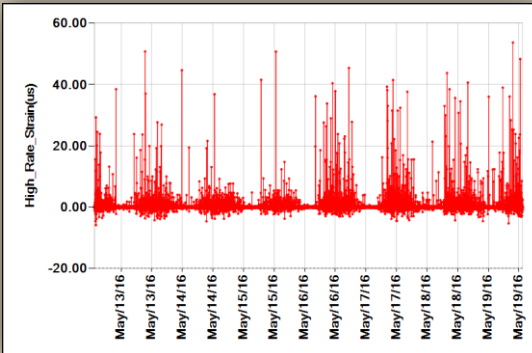
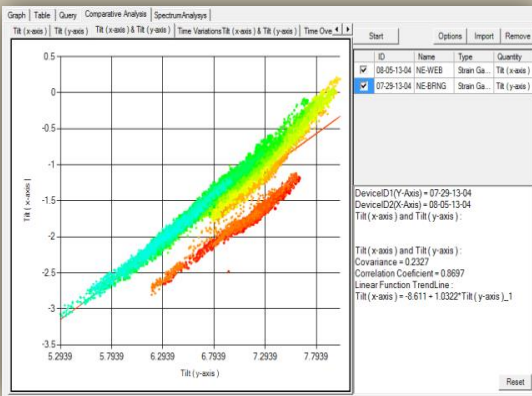


Strain SenSpot™

Game-changing technology for monitoring strain, fatigue damage awareness, and load rating

- Long-term and continuous monitoring of strain (stress)
- Detecting short-lived and transient high-strain events, e.g., caused by fast moving trucks on highway bridges or by turbulence on airframes
- Fatigue awareness, fatigue life analysis (remaining useful life estimation)
- Fast, easy-to-install adhesive mount
- Examples applications:
 - Highway bridges
 - Airframes
 - Pipelines
 - Machines, cranes, etc.
 - Truck tests, bridge load rating

The 8-second “zoomed in” data shows the loading effect of a single truck.
(Loading effects of front and rear axles can be seen)

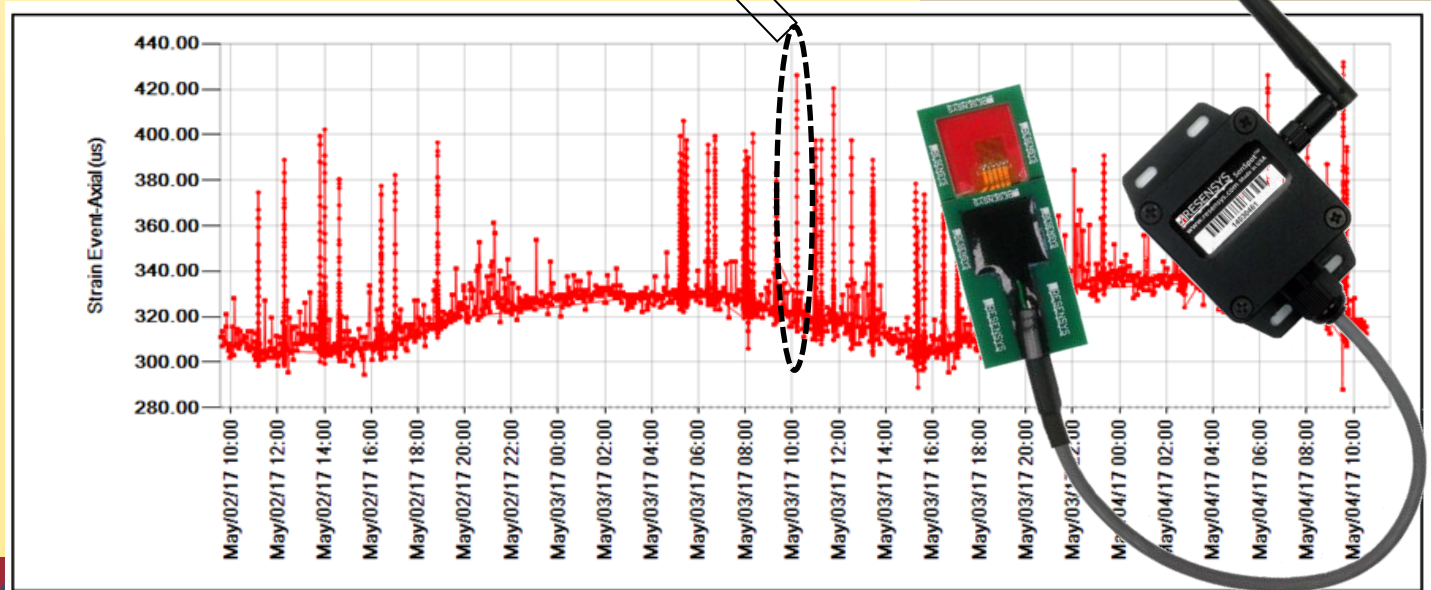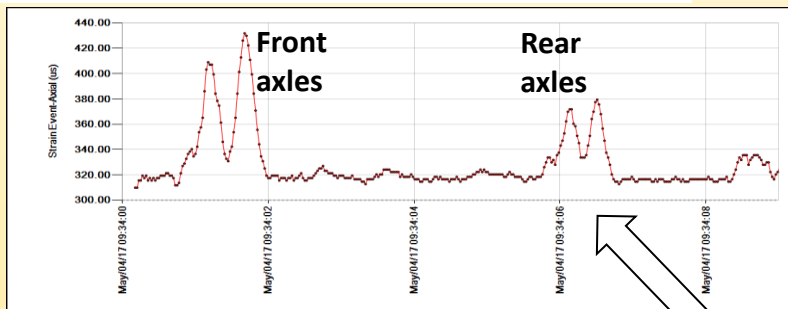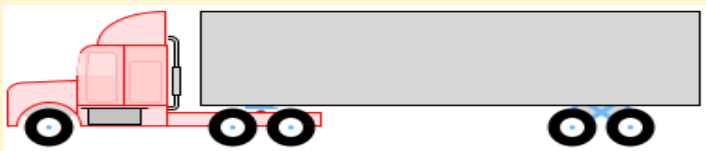




Tilt/Inclination SenSpot™

A breakthrough tool for precise monitoring of tilt, inclination, settling, bending, deformation, and deflection


- Monitoring deflection, bending, settling of piers, abutments at high precision (resolution 0.00016 degree or 0.5 arc seconds)
- Monitoring vertical/ horizontal displacement in spans, pylons, piers using analytical model
- Detecting change in tilt caused by settling, deformation, or permanent change in loading.
- Detecting any over-tilting or unhealthy change in tilt that may affect overall safety of the structure.

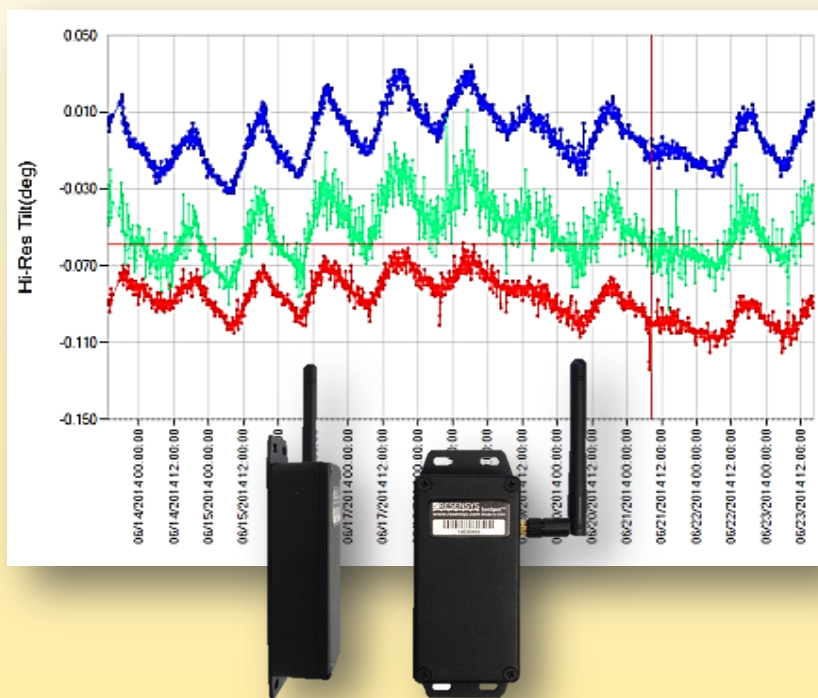



Using Resensys's high precision tilt SenSpot sensors, movement, settling, deformation and abnormal tilting of bridge piers are detected at an early stage, before such issues become major problems or lead to safety compromise and/or road closure.

High precision tilt data helps calculate vertical/horizontal displacement of piers, pylons and spans.

Monitoring bearings and girders

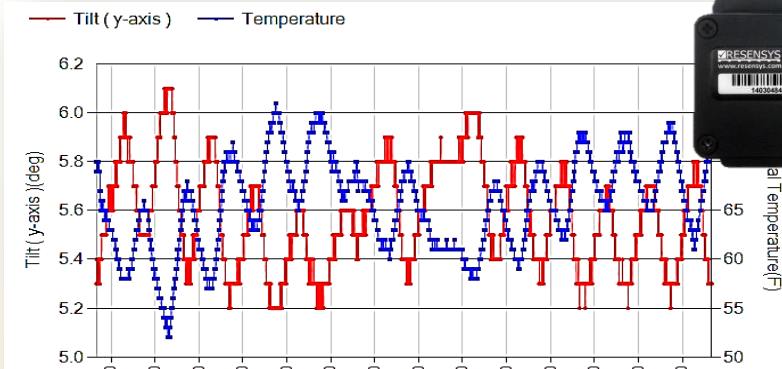


- Bearings are designed to accommodate the expansion and contraction of a bridge deck and superstructure as a result of temperature change.
- Accumulated stress as a result of malfunctioning bearings can damage a structure by forming fatigue cracks in steel, piers, and abutments.
- Resensys SenSpot™ sensors provide accurate information about tilt, temperature and strain on bridge bearings; the system can detect instances where the bearings are partially or completely frozen.
- As a secondary measurement, in addition to the tilt SenSpot™ sensors on bearings, strain SenSpot™ sensors can be used to monitor stress on girders. When bearings become completely or partially frozen, overstrain is likely to happen in girders of the spans next to malfunctioning bearings.

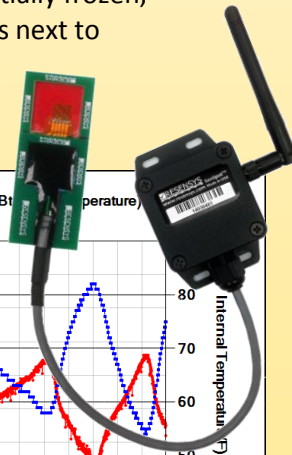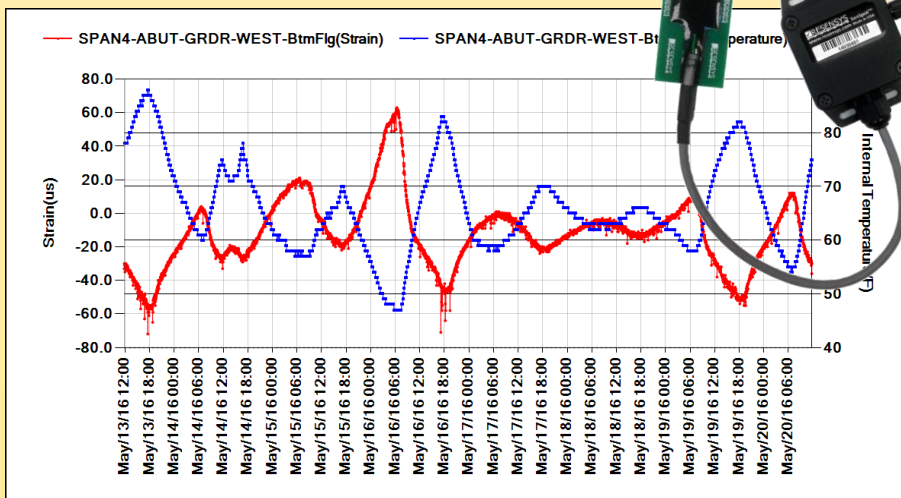


Displacement SenSpot™

- Monitors expansion joints
- Monitors activity / propagation of existing cracks.
- Monitors movement

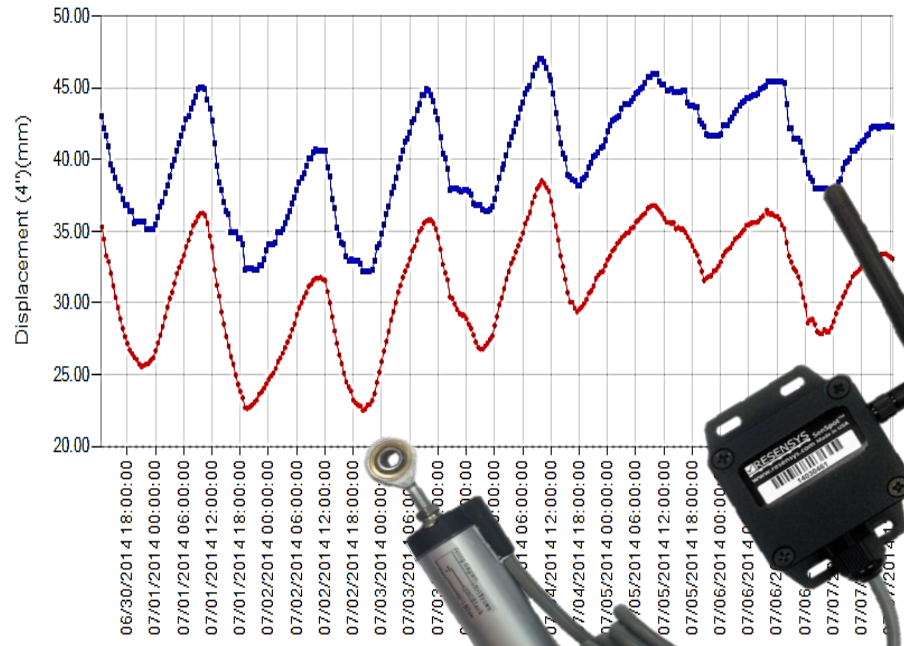

Vibration SenSpot™

- Monitors single axis or tri-axial acceleration
- Monitoring tension in hanger cables
- Calculates natural frequencies/ modal analysis
- Detects shift in natural frequencies

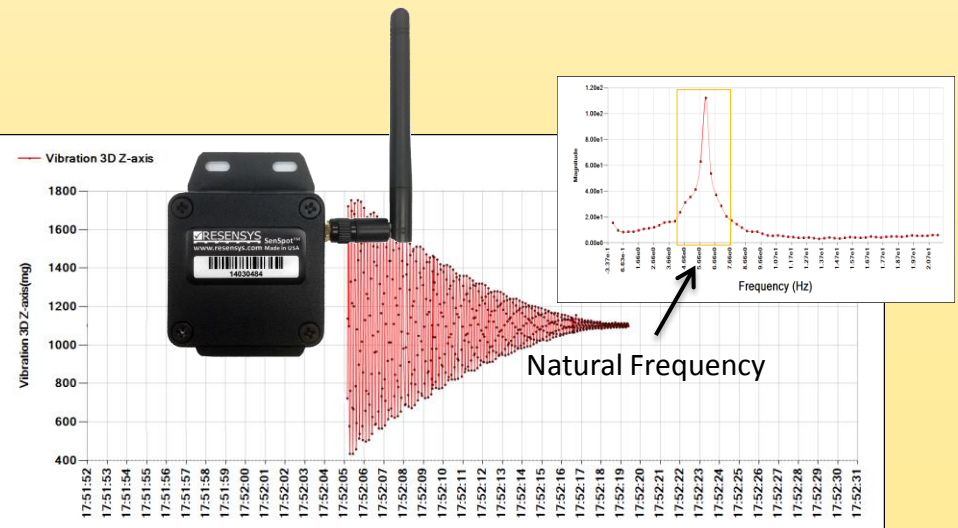

Enhanced SenSpot™ Sensors

Advanced solar powered wireless SenSpot™ sensors for Structural Health Monitoring

- **Weather station:** for measuring key meteorological variables including wind speed and direction, atmospheric pressure, temperature, humidity.
- **Anemometer:** For two or three dimensional monitoring of wind speed, wind direction, sonic speed, and air temperature. Applications include weather awareness, aviation industry, hydrometeorology, military/maritime meteorology.
- **Ultrasonic distance meter:** For monitoring distance or presence of a target object. Applications include water level measurement for detecting flood condition in scour critical bridges, dimensioning, and roll diameter monitoring.
- **PWS sensor :** For monitoring the visibility and precipitation on the road.
- **VGA Camera:** For periodic or event driven image capturing. Applications include barge /vessel collision detection, monitoring bridge scour condition, water level monitoring, and or security and surveillance.
- **Geophone:** For monitor the smallest movements of structural components caused by seismic, excavation, or heavy construction activity.

Resensys Enhanced SenSpot™ Sensors are:

- **Solar-powered with rechargeable battery, energy self sufficient, no need for electricity**
- **Can stream data through:**
 - ☐ Direct cellular connection (3G/4G/LTE)
 - ☐ Direct Wireless LAN connection
 - ☐ Satellite
- **Fully weatherproof** for operation in harsh environments
- **Easy to install**



Anemometer SenSpot™





Ultrasonic water level meter SenSpot™




VGA Camera SenSpot™

SenSpot™ for Bridge Load Rating

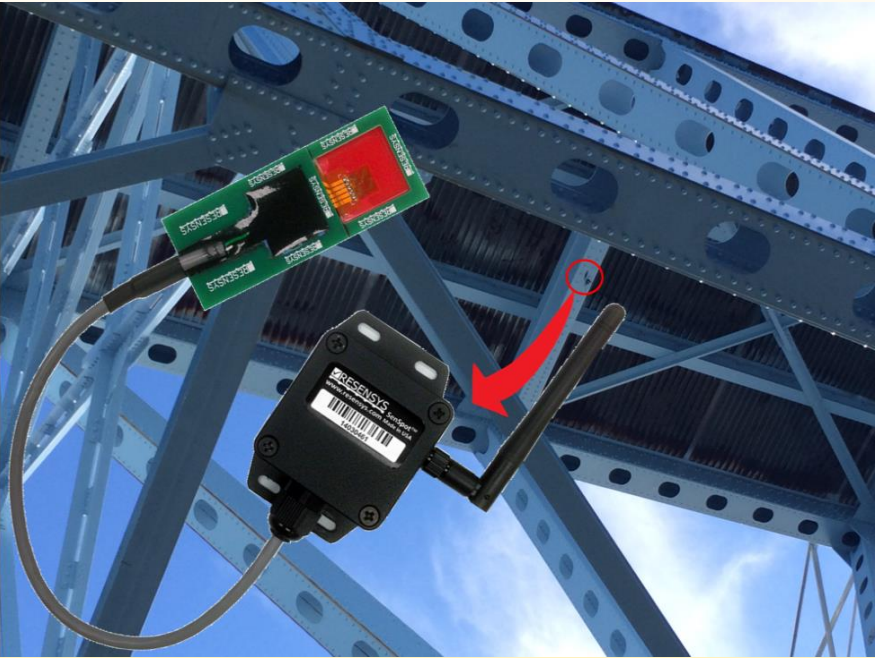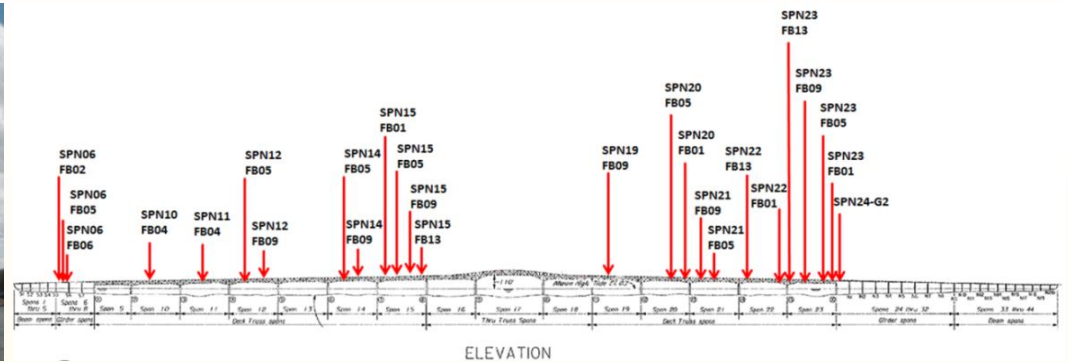

A breakthrough method for fast and accurate bridge load rating:

1. Attach adhesive mount wireless strain SenSpots™ to critical members (e.g., beams, girders, truss members, gussets);
2. Drive truck of known weight over the bridge;
3. Calculate load carrying capacity using the responses

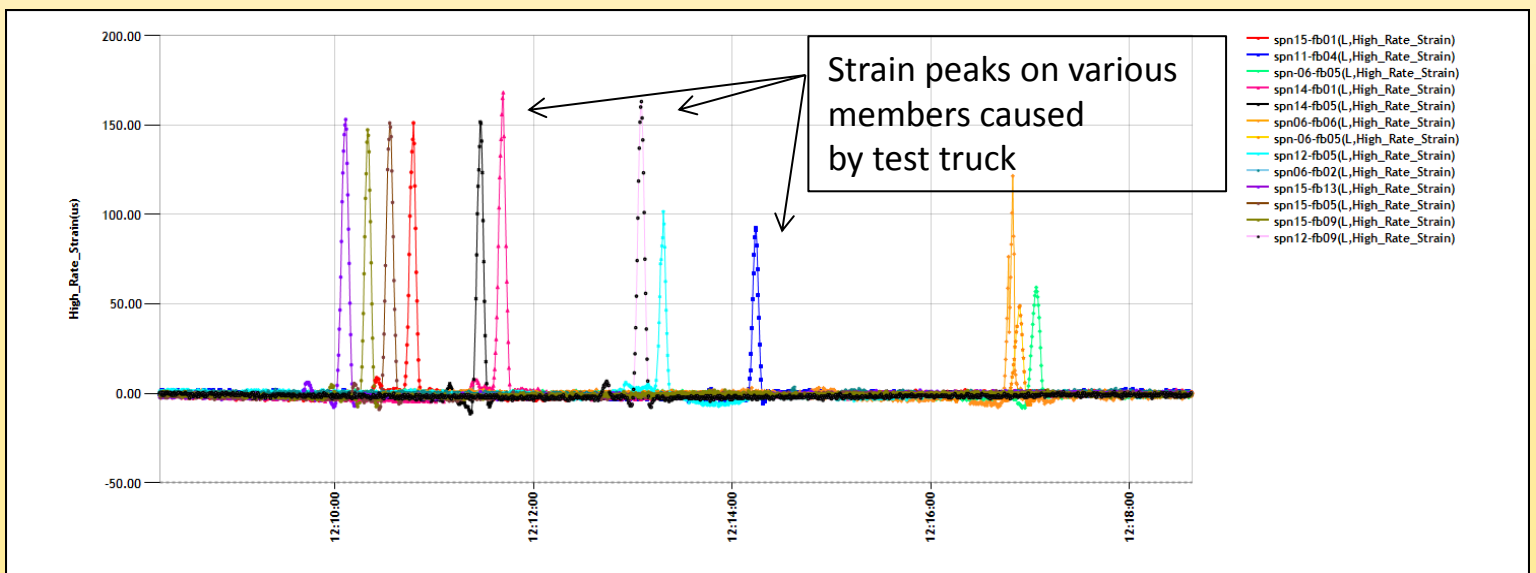

SenSpot™ for Monitoring Scour-Critical Bridges

Monitoring approach:



- **Wireless tilt/inclination SenSpot (sub arc second accuracy):** to detect instability, settling on piers and abutments
- **Wireless water level SenSpot:** to monitor flood condition
- **Wireless Sonar:** to monitor sediment around the piers
- **Wireless camera:** visual feedback
- **Wireless scour probe SenSpot:** to monitor scour condition and level



SenSpot™ for Monitoring Cable Tension

Monitoring approach

- Monitoring vibration on cable
- 2048-point Fast Fourier Transform (FFT) analysis to find natural frequencies
- Detect changes on cable (e.g., wire break, damage)

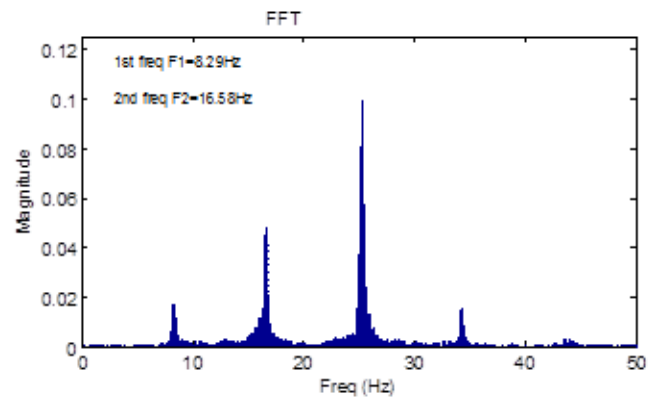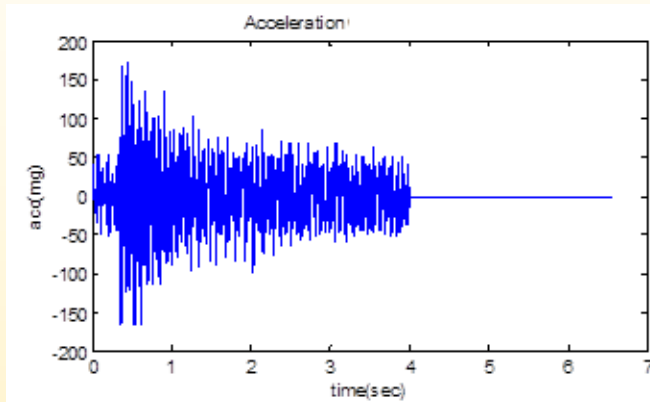


**Wireless accelerometer
(vibration) SenSpot on cable**



SenSpot™ for Monitoring buildings: settling, vibration, crack

- Displacement SenSpot™ is used for measurement and progress of the existing cracks in a structure. This device has a sliding element which moves with displacement of structure or growth of a crack.
- Inclination/Tilt SenSpot™ is used to monitor smallest movements in walls or floors caused by settling in foundation.
- Humidity/Temperature SenSpot™ reports environmental conditions.

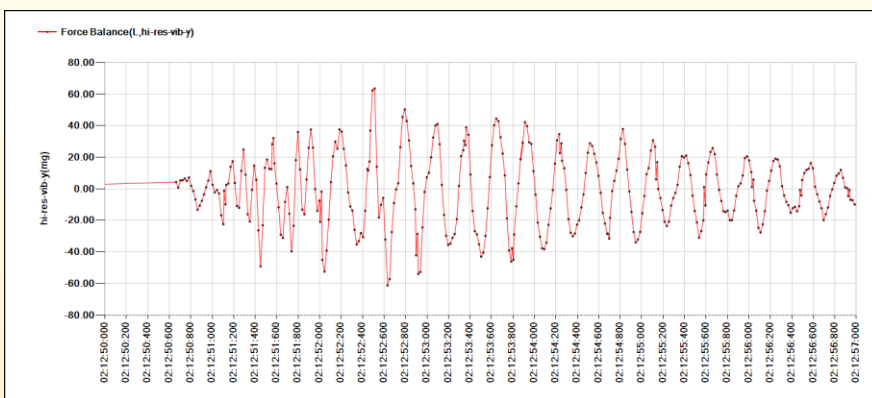

Seismic activity waveform reported by a Resensys vibration SenSpot™. The device detected an earthquake on December 30, 2015 in British Columbia, Canada.


Other Applications: Tunnels, towers, pipelines, and cranes are more examples of structures that can use Resensys Structural Health Monitoring Systems.



Resensys Monitoring Services

Immediate Alert Services:

Facilitate detection of critical failures, when immediate action is needed. Alert administration is conducted through text message and email notifications.

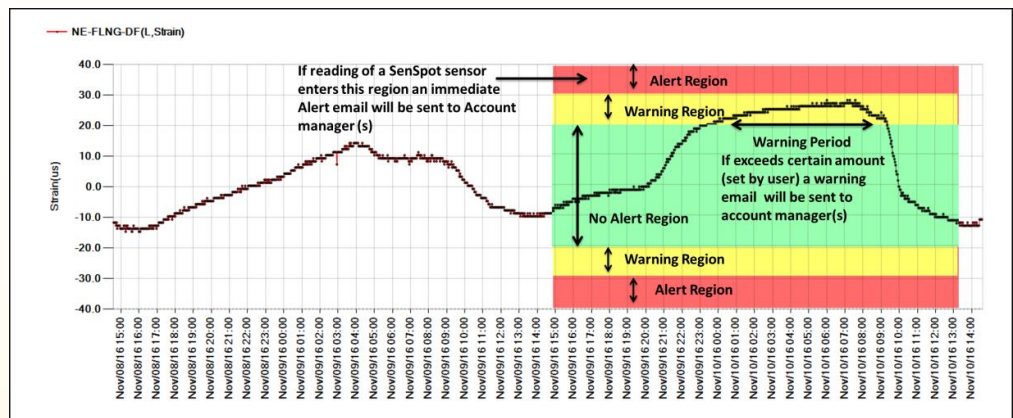


Regular Alert Services:

Facilitate detection of non-critical failures, when immediate action is not needed. Emails with detected alerts are administered regularly (daily, weekly, or monthly).

Device ID	Site ID	Quantity	Time	Average	Maximum	Minimum	Count	LowLow%	Low%	High%	HighHigh%	Alert Type	Status	Interval
0001005	1005	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	VERY_LOW_AL	00:00:00
0001007	1007	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001008	1008	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	VERY_LOW_AL	00:00:00
0001100	1100	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001101	1101	NA	12/20/17 11:36	0	0	0	10	0	0	0	0	DISCONNECT	HI_WARNING	00:00:00
0001102	1102	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001103	1103	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001104	1104	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001105	1105	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001106	1106	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001107	1107	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001200	1200	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001201	1201	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001202	1202	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001601	1601	NA	12/20/17 11:36	0	0	0	10	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001602	1602	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001603	1603	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001604	1604	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00
0001605	1605	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	VERY_LOW_AL	00:00:00
0001606	1606	NA	12/20/17 11:36	0	0	0	0	0	0	0	0	DISCONNECT	NO_ALERT	00:00:00

Data Analysis Services:

- **Statistical analysis:** statistical properties of the readings of a single or a group of SenSpot sensors (e.g., maximum, minimum, median, standard deviation in a time range).
- **Comparative Analysis:** sophisticated regression and correlation analysis tools to compare the relative behavior of time series with respect to each other.
- **Spectral analysis** Fast Fourier Transform (FFT) calculations on SenSpot acceleration data for modal analysis, finding natural frequencies.

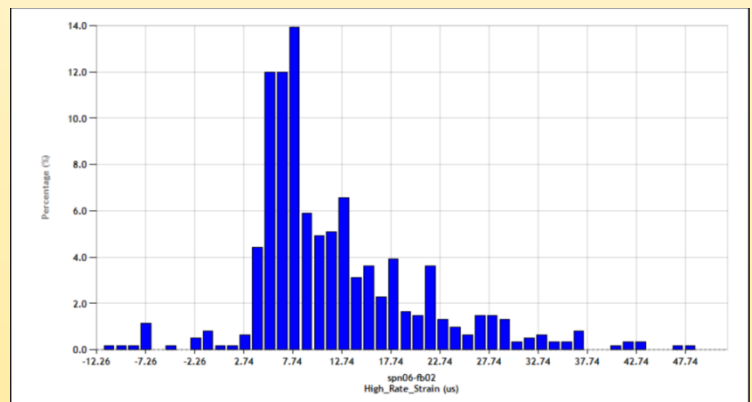

Data Hosting Services: Data is stored in Resensys's secured cloud servers and backed up periodically. Data can be accessed using Secure Sockets Layer (SSL) from anywhere. Data can be exported to Excel, TXT, CSV, and XML formats.

Featured Monitoring Projects

- **Gold Star Memorial Bridge, Connecticut (I-95 Over Thames River):** monitoring girders, bearings, gusset plates, and truss members.
- **MD 17 Over CSX Trans., Potomac River, Maryland:** monitoring bearings, girders.
- **Robert Norris Bridge, Virginia:** monitoring floor beams, girders.
- **Elizabeth bridge, Pennsylvania:** monitoring hanger cable tension, piers, girders , and truss members, barge collision monitoring
- **East Capitol Bridge over Anacostia River, Washington DC:** monitoring piers, abutments.
- **Chesapeake Bay Bridge, West Bound(Span 35), Maryland:** monitoring bearings, stringers, pier.
- **Soekarno Bridge, Indonesia:** monitoring vibration, temperature, humidity, wind speeds and direction, and strain on pier, pylon, girders, abutments.
- **San Geronio Levee, California:** monitoring potential damage of the levee.
- **I-70 WB over US 6 and Clear Creek Bridge, Colorado:** monitoring vibration, temperature, strain on girders, piers, abutments.
- **US Air Force C-130 military airplane:** monitoring cargo ramp.
- **US-522 over Potomac River, Maryland:** monitoring bearings, girders.
- **Calgary Airport Tunnel, Canada:** monitoring temperature, displacement across the tunnel.
- **SR-16 Clay County Culvert, Florida:** monitoring strain on concrete culvert pipes.
- **Elk Creek Bridge, California:** scour monitoring.
- **San Geronio Wash Bridge, California:** monitoring piers, scour.




Monitoring Scour-Critical Bridges

East Capitol Bridge over Anacostia River, District of Columbia

In June 2014, Resensys SenSpot sensors were used on piers of East Capitol Bridge across Anacostia River to monitor their movement, settling and deflections. Piers of highway bridges over rivers are vulnerable to bridge scour caused by fast moving water from around bridge abutments or piers. Deep bridge scour removes the riverbed materials beneath the piers and abutments footings which results in deflection, movement and settling of the piers and compromise of bridge's stability and safety.

Resensys High Precision Tilt SenSpot sensors provide an ideal solution for structural health monitoring of scour critical bridges by monitoring tilt (inclination) on piers and abutments with a resolution of 0.00016 degree (0.5 arc seconds).

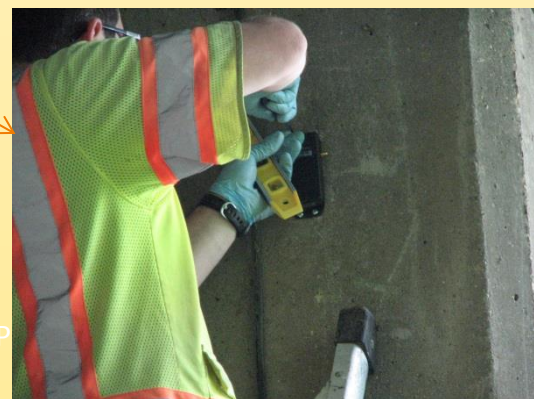

Monitoring Major Structures

Gold Star Memorial Bridge, Connecticut

In December 2015, a Resensys structural health monitoring system was deployed on Gold Star Memorial Bridge which carries Interstate 95 over Thames River.

The 6000-foot, 27-span bridge consists of 16 girder/floor-beam/stringer spans and 11 main deck truss spans composite with a reinforced concrete deck, supported by abutments and piers. The Resensys remote monitoring system installed on the Gold Star Memorial Bridge included high rate strain SenSpot sensors, tilt SenSpot sensors, SeniMax data loggers and remote communication gateways, and auxiliary signal repeaters.

In addition to continuous monitoring of girders, bearings, gusset plates, and truss members, load rating tests were conducted on Gold Star bridge by Connecticut Department of Transportation using Resensys high rate strain SenSpot sensors.





Monitoring Major Structures

Soekarno Bridge, Indonesia

In December 2015, Soekarno Bridge in Manado, Indonesia was instrumented with a network of 90 Resensys wireless SenSpot sensors. The wireless SenSpots included vibration SenSpots, high precision inclinometer SenSpots, strain gauge SenSpots, temperature SenSpots, and anemometer SenSpots.

All SenSpots sensors are wireless and transmit data to a SeniMax gateway data logger, which streams live data to a secured cloud based server, accessible through the internet from everywhere in the world.



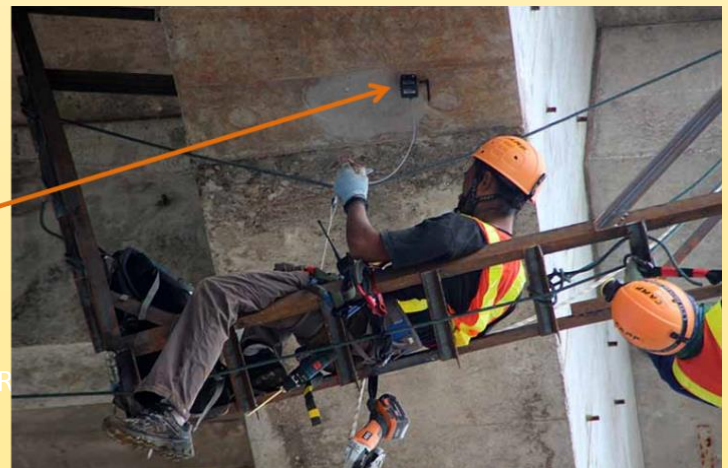
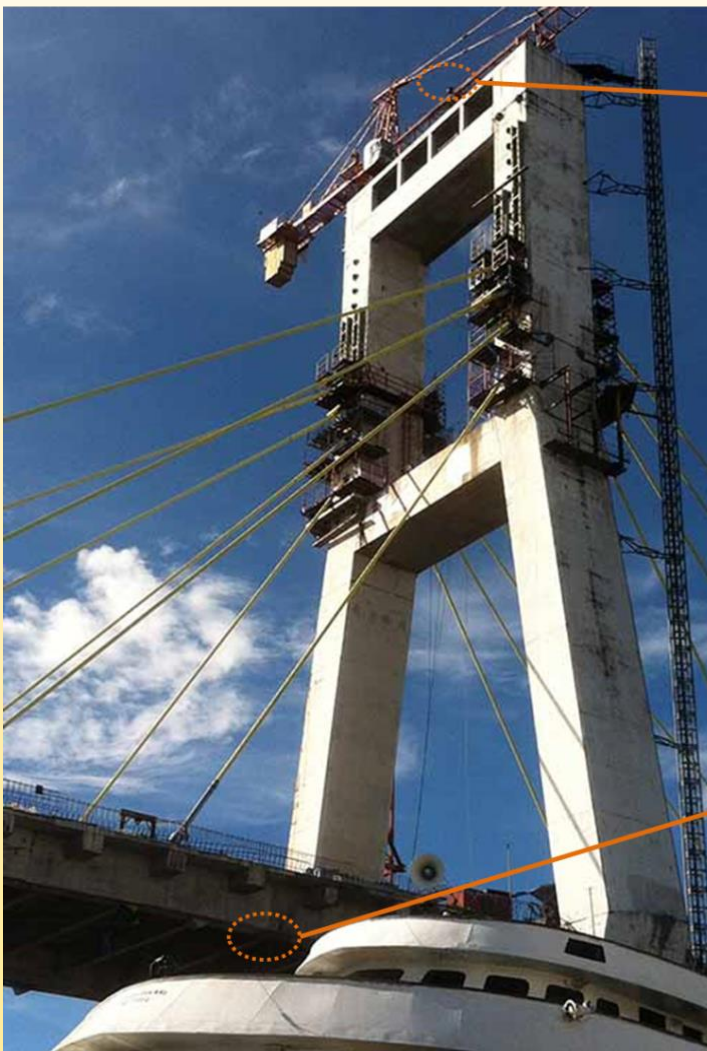


Monitoring Major Structures

Robert Norris Bridge, Virginia

The Robert O. Norris Jr. Bridge which carries Route 3, spans the lower Rappahannock River from Grey's Point to White Stone, Virginia. This structure has a total length of 9,985 ft consisting of 44-spans of varying construction. In October 2015, a Resensys structural health monitoring system was deployed on the structure for monitoring floor beams and girders. The system includes High rate strain SenSpot sensors, SeniMax gateways, and signal repeaters.

Resensys technology offers a breakthrough method for long term monitoring and fast and accurate bridge load rating. By attaching adhesive mount wireless strain SenSpots to critical members (e.g., beams, girders, truss members, gussets) and driving a truck of known weight over the bridge load carrying capacity will be calculated using the responses of the members.

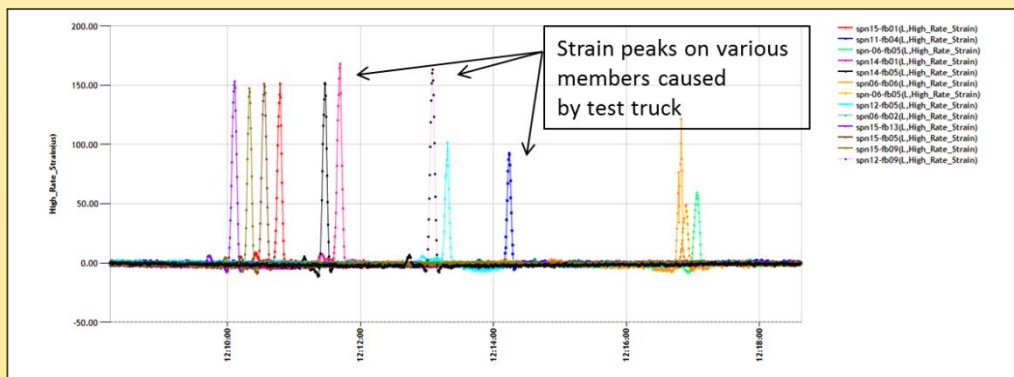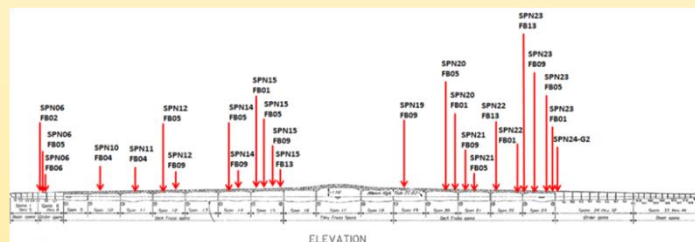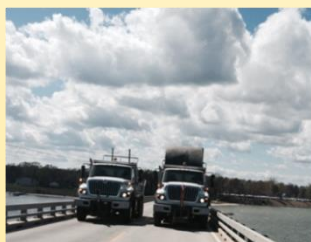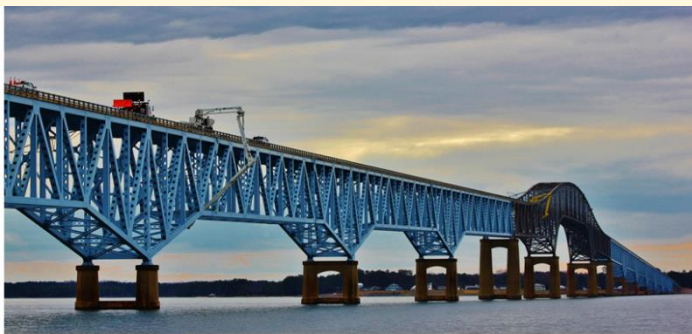


Monitoring Stress on Concrete Culvert Pipes

SR-16 Clay County , Florida

In November 2016, a Resensys structural health monitoring system was deployed on a culvert running under Florida SR-16 in Clay County. The system consists of four high rate strain SenSpot sensors and one SeniMax data logger and remote communication gateway.



Using the system, live load test was used to confirm structural integrity of the structure and to ensure its capability to withstand its rated load.

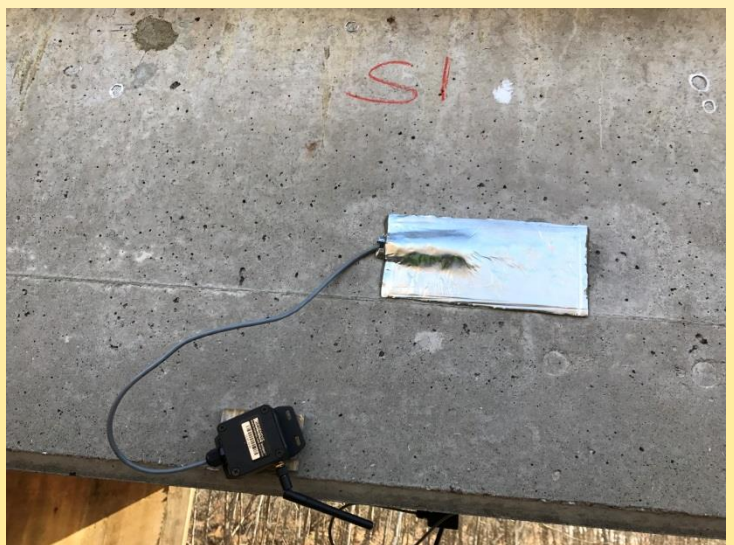



Protecting Infrastructure with 21st Century Technology



A wide-angle photograph of the Golden Gate Bridge in San Francisco, California. The bridge's iconic orange-red towers and suspension cables are prominent against a clear blue sky with light clouds. The bridge spans a body of water, with hills and city buildings visible in the background.

RESENSYS LLC

Resensys was founded in 2008 with the mission of protecting infrastructure systems against aging, deterioration, and collapse. For this purpose, Resensys offers a range of structural monitoring solutions based on its award winning ultra low power wireless sensor network technology, known as SenSpot™. Resensys wireless SenSpot sensors provide a versatile platform for remote monitoring of structures on a wide range of structural quantities; examples include strain (stress), vibration, tilt, inclination, temperature, humidity, and acoustic emission events. Having monitored all these important structural quantities in real time, SenSpot sensors provide reliable tools to measure overstrain, metal fatigue, formation of cracks, movement and stability of foundation, as well as monitoring vibration and performing modal analysis. Currently, Resensys's SenSpots are the world's most energy efficient wireless monitoring sensors and a SenSpot sensor provides a minimum of 10 years of monitoring using a small ½-AA battery.

Protecting Infrastructure with 21st Century Technology

Resensys LLC
387 Technology Drive
College Park, MD 20742
Phone: 301.405.9108
<http://www.resensys.com/>
Email: info@resensys.com

